



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

CMA48SD-1

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Performance Data

Power supply Ph-V-Hz 208/230V~ 60Hz, 1Ph

Cooling

Capacity	Btu/h	46000
Total Load	A	20.5
EER	Btu/w	11.4
SEER	Btu/w	13
MIN. CIRCUIT AMPACITY	A	26
MAX.FUSE	A	40

Compressor Electrical

Model	ZP42K5E-PFV-130
Type	SCROLL
Brand	Copeland
Capacity	Btu/h 42000 (at 230V)
Input	W 4070 (at 230V)
Rated current(RLA)	A 18.40 (at 230V)
Coil Treatment	Silver



Min. Outdoor Ambient Temperature

Outdoor(cooling) °F 65

Fan Motor

Model	YDK100-6D / YDK100-6D
Brand	KAIBANG
Input	W 220/220
Capacitor	uF 5/5
Speed	r/min 830/830

System Operational Data

Design pressure	PSIG	540/300
Refrigerant oil		R410A/4100g
Oil charge	oz	42
Refrigerant type/charge	oz	3MAF POE
Liquid side/ Vapor side	in	3/8-3/4
Max. length	ft	65.6
Max. height difference	ft	32.8


Air Flow & Noise Level

Outdoor air flow	CFM	4120
Outdoor noise level	dB(A)	60

Dimensional Data

	Dimension(W*D*H)	inch	35.9x15.75x52.36
Thermostat type	Standard 24v Control	Packing (W*D*H)	inch 37.95x15.83x56.9
Connection wiring	18ga 2 Conductor	Net/Gross weight	lbs. 185/207.2

CMA48SD-1

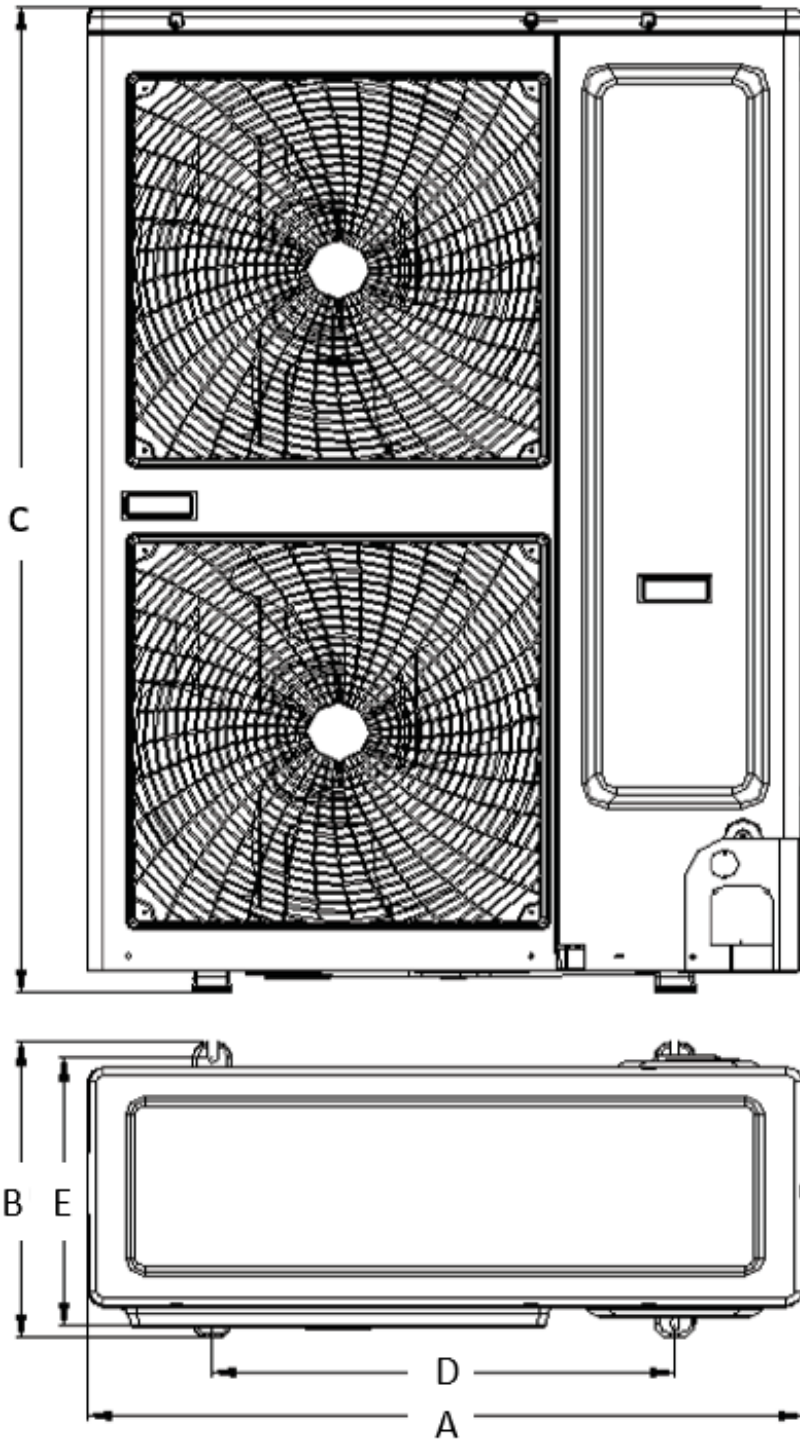

Accessories

83907	Surge Protection
83916	Disconnect with internal surge
83335	60 amp Unfused Disconnect
93642	Wall Mount Bracket
93540	Condenser Pad

Dimensions	
Model	CMA48SD-1
A	35.9"
B	15.7"
C	52.4"
D	23"
E	14.2"