



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTAC07F230ASC

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply	265V/1/60
--------------	-----------

Cooling

Capacity	Btu/h	7200/7400
Input	W	605/620
Rated current	A	2.8/3.0
EER	Btu/w	11.9/11.9

Heating

Capacity	Btu/h	NA
Rated Input (elect. Heater)	Kw	3
Rated current	A	NA
Max. Current	A	NA

Compressor Electrical

Model	39B142G	
Type	ROTARY	
Brand	RECHI	
Capacitor	mF	15
Refrigerant type	oz	R410A/20.1

Air flow & Noise level

Indoor air flow	CFM	620/720
Indoor noise level	dB(A)	41/49
Outdoor noise level	dB(A)	66

Indoor Fan Motor

Model	YDK-25-4P2	
Input	W	55
Capacitor	uF	1.5
Speed(Hi/Lo)	rpm	900/650

Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A
Wired Wall Thermostat	7602-536



Outdoor Fan Motor

Model	YDK-55-4P2-4	
Input	W	104
Speed	RPM	1600

Dimensional Data


Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3x24.8x18.9
Net/Gross weight	lbs.	94/105

System Data

Design pressure	PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-20P

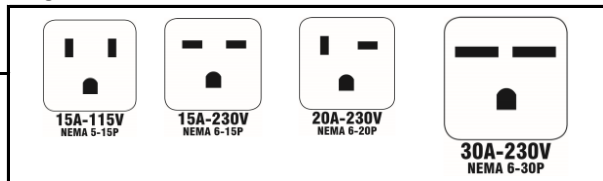

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535