



1900 Wellworth Ave. • Jackson, MI 49203  
517-787-2100

# Submittal Data

MODEL  
**PTAC12F230ASC**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply		265V/1/60
<b>Cooling</b>		
Capacity	Btu/h	12000/12200
Input	W	1120/1140
Rated current	A	5.0/5.5
EER	Btu/w	10.7/10.5

<b>Heating</b>		
Capacity	Btu/h	NA
Rated Input (elect. Heater)	Kw	3
Rated current	A	NA
Max. Current	A	NA

<b>Compressor Electrical</b>		
Model		44B282A
Type		ROTARY
Brand		GMCC
Capacitor	mF	40
Refrigerant type	oz	R410A/33.5

<b>Air flow &amp; Noise level</b>		
Indoor air flow	CFM	650/750
Indoor noise level	dB(A)	47/53
Outdoor noise level	dB(A)	66

<b>Indoor Fan Motor</b>		
Model		YDK-30-4P2
Input	W	64
Capacitor	uF	1.5
Speed(Hi/Lo)	rpm	1050/850

<b>Accessories</b>	
Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A
Wired Wall Thermostat	7602-536




<b>Outdoor Coil</b>	Seacoast Coating
<b>Outdoor Fan Motor</b>	
Model	YDK-55-4P2
Input	W 95
Speed	RPM 1600

<b>Dimensional Data</b>	
Dimension(W*H*D)	inch 41.97x21.1x16.1
Packing (W*H*D)	inch 45.3*24.8*18.9
Net/Gross weight	lbs. 102/113

<b>System Data</b>	
Design pressure	PSIG
	Remote Controller
Thermostat type	On-Board
	Wired Thermostat

<b>Cord and Plug</b>		
Cord Length	ft.	6.5
Plug Face	Nema	6-20P

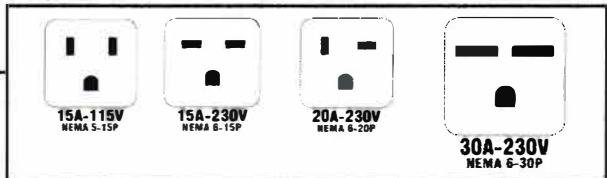

Subbase (no receptacle)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535