



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL

PTAC15A130BSC

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply 208/230V/60

Cooling

Capacity	Btu/h	14300/14500
Input	W	1450/1470
Rated current	A	7.0/6.4
EER	Btu/w	10.14

Heating

Capacity	Btu/h	NA
Rated Input (elect. Heater)	Kw	3
Rated current	A	NA
Max. Current	A	NA

Compressor Electrical

Model	ASM135N1UEZ
Type	ROTARY
Brand	GMCC
Capacitor	mF 40
Refrigerant type	oz R410A/34.2

Air flow & Noise level

Indoor air flow	CFM	470/410
Indoor noise level	dB(A)	48/45
Outdoor noise level	dB(A)	66

Indoor Fan Motor

Model	YDK-30-4P2-4
Input	W 64
Capacitor	uF 1.5
Speed(Hi/Lo)	rpm 1050/850

Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536
Universal Remote	7602-512



Outdoor Coil Seacoast Coating

Outdoor Fan Motor

Model	YDK-65-4P2-1
Input	W 100
Speed	RPM 1680

Dimensional Data


Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	112/126

System Data

Design pressure	PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-30P

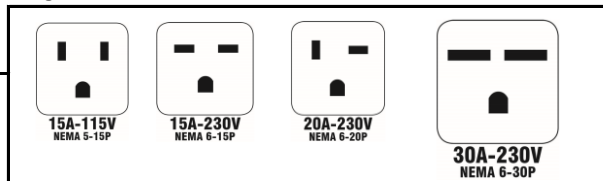

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Wired Thermostat	7800-200
Thermostat Locking Cover	7602-535