



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTAC15F130A

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply		208/230V/60
--------------	--	-------------

Cooling

Capacity	Btu/h	14300/14500
Input	W	1430/1450
Rated current	A	6.4/7.0
EER	Btu/w	10.0/10.0

Heating

Capacity	Btu/h	NA
Rated Input (elect. Heater)	Kw	3
Rated current	A	NA
Max. Current	A	NA

Compressor Electrical

Model		44B342U
Type		ROTARY
Brand		RECHI
Capacitor	mF	30
Refrigerant type	oz	R410A/34.2

Air flow & Noise level

Indoor air flow	CFM	700/800
Indoor noise level	dB(A)	49/52
Outdoor noise level	dB(A)	66

Indoor Fan Motor

Model		YDK-30-4P2-4
Input	W	64
Capacitor	uF	1.5
Speed(Hi/Lo)	rpm	1050/850

Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A
Wired Wall Thermostat	7602-536



Outdoor Fan Motor

Model		YDK-55-4P2-4
Input	W	104
Speed	RPM	1600

Dimensional Data


Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	108/119

System Data

Design pressure	PSIG	
	Remote Controller	
Thermostat type	On-Board	
	Wired Thermostat	

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-30P

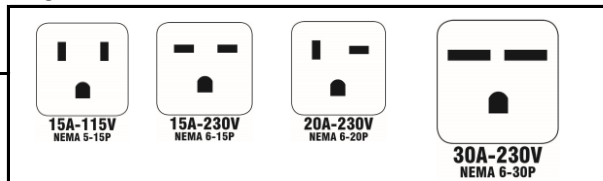

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535