



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL

PTHP07F130A-CY

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply 208/230V/60

Cooling

Capacity	Btu/h	6800/7200
Input	W	570/605
Rated current	A	2.7/2.8
EER	Btu/w	11.9/11.9

Heating

Capacity	Btu/h	5800/6000
Rated Input (elect. Heater)	Kw	3
Rated current	A	2.3/2.5
Max. Current	A	3.6

Compressor Electrical

Model	39B142G
Type	ROTARY
Brand	RECHI
Capacitor	mF 15
Refrigerant type	oz R410A/20.1

Air flow & Noise level

Indoor air flow	CFM	620/720
Indoor noise level	dB(A)	41/49
Outdoor noise level	dB(A)	66

Indoor Fan Motor

Model	YDK-25-4P2
Input	W 55
Capacitor	uF 1.5
Speed(Hi/Lo)	rpm 750/650

Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A
Wired Wall Thermostat	7602-536



Outdoor Fan Motor

Model	YDK-55-4P2
Input	W 104
Speed	RPM 1600

Dimensional Data


Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3x24.8x18.9
Net/Gross weight	lbs.	94/105

System Data

Design pressure	PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-20P

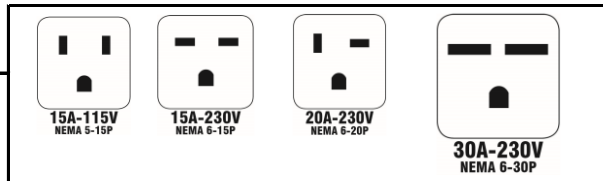

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535