



1900 Wellworth Ave. • Jackson, MI 49203  
517-787-2100

# Submittal Data

## MODEL PTHP15A150B

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply	208/230V/60
--------------	-------------

#### Cooling

Capacity	Btu/h	14300/14500
Input	W	1400/1420
Rated current	A	7.0/6.4
EER	Btu/w	10.2/10.2

#### Heating

Capacity	Btu/h	13200/13600
Rated Input (elect. Heater)	Kw	5
Rated current	A	5.6/5.2
Max. Current	A	8.9

#### Compressor Electrical

Model	ASM135N1UEZ	
Type	ROTARY	
Brand	GMCC	
Capacitor	mF	40
Refrigerant type	oz	R410A/34.2

#### Air flow & Noise level

Indoor air flow	CFM	470/410
Indoor noise level	dB(A)	48/45
Outdoor noise level	dB(A)	66

#### Indoor Fan Motor

Model	YDK-30-4P2-4	
Input	W	64
Capacitor	uF	1.5
Speed(Hi/Lo)	rpm	1050/850

#### Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536
Universal Remote	7602-512



#### Outdoor Fan Motor

Model	YDK-65-4P2-1	
Input	W	100
Speed	RPM	1680

#### Dimensional Data


Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	112/126

#### System Data

Design pressure	PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

#### Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-30P

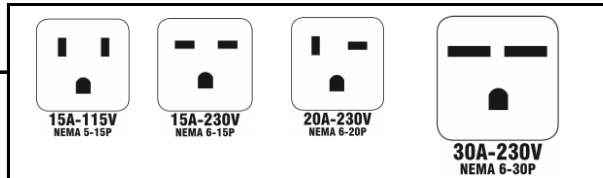

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Wired Thermostat	7800-201
Thermostat Locking Cover	7602-535