



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTHP15A150BSC

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply		208/230V/60
--------------	--	-------------

Cooling

Capacity	Btu/h	14300/14500
Input	W	1400/1420
Rated current	A	7.0/6.4
EER	Btu/w	10.2/10.2

Heating

Capacity	Btu/h	13200/13600
Rated Input (elect. Heater)	Kw	5
Rated current	A	5.6/5.2
Max. Current	A	8.9

Compressor Electrical

Model		ASM135N1UEZ
Type		ROTARY
Brand		GMCC
Capacitor	mF	40
Refrigerant type	oz	R410A/34.2

Air flow & Noise level

Indoor air flow	CFM	470/410
Indoor noise level	dB(A)	48/45
Outdoor noise level	dB(A)	66

Indoor Fan Motor

Model		YDK-30-4P2-4
Input	W	64
Capacitor	uF	1.5
Speed(Hi/Lo)	rpm	1050/850

Accessories

Wall Sleeve-breakdown		7602-500F
Stamped Aluminum Grill		7602-501F
Architectural Aluminum Grill		7602-505F
Colored Polymer Grills		See Catalog
Indoor Discharge Air Deflector		7602-508F
Wireless Wall Thermostat		7602-536
Universal Remote		7602-512



Outdoor Coil Seacoast Coating

Outdoor Fan Motor

Model		YDK-65-4P2-1
Input	W	100
Speed	RPM	1680

Dimensional Data


Dimension(W*D*H)	inch	41.97x21.1x16.1
Packing (W*D*H)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	112/126

System Data

Design pressure		PSIG
		Remote Controller
Thermostat type		On-Board
		Wired Thermostat

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-30P

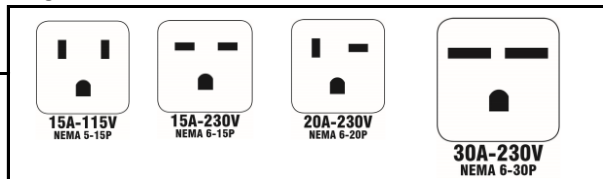

Subbase (no receptical)		7602-509F
Drain Kit		7602-506F
Duct Kit		7602-511F
Wired Thermostat		7800-201
Thermostat Locking Cover		7602-535