



## Start Strong with PolarPad

Condenser installations begin better with PolarPad. The PolarPad is a plastic pad engineered and designed as a base for HVAC equipment. The pad is injection molded from polyethylene, which is durable, strong, and lightweight. The unique design has strong, uniform ribbing along the underside. The pad is molded with a texture along the top for traction, and rounded edges on the sides to give a clean concrete look and feel.

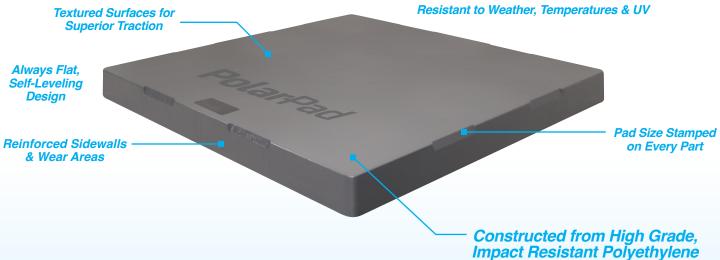

## **Technical Specifications**

- ☐ Polyethylene Resin Resistance:
  - refrigerants, oils, salt solutions, canine urine, and UV degradation
- **☐** Service Temperature:
  - -60°F to 180°F
- **□** Combustible Temperature:
  - 662°F auto ignition
  - 649°F flash ignition
- ☐ Polyethylene Resin Approvals:
  - ASTM D4976 PE233
  - FDA 21 CFR 177.1520<sup>®</sup> 3.2a (B-H per 21 CFR 176.170(c)

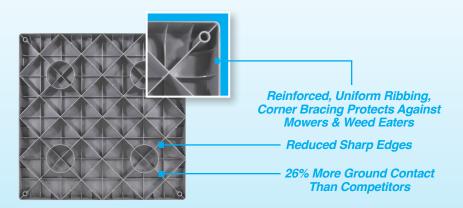

Unparalleled Durability, Perfectly Level, and 90% Lighter Than Concrete Pads... and That's Just the Tip of the Iceberg.





## Start Strong with PolarPad

The PolarPad Difference					
Superior Strength	√	Self-Leveling Self-Leveling	V		
Lightweight	<b>√</b>	Resists Cracking	√ √		
UV Resistance	<b>√</b>   <b>√</b>	Virgin Material	1		
Superior in Cold Weather	√	√ Made with Polyethylene			
Superior Impact Resistance	<b>√</b>   √	Always a Flat Part			
Reinforced Sidewalls	√	Consistent Availability, Lead Times			
Superior Lifespan	<b>√</b>	Consistent Coloring			

## **Multiple Sizes, Profiles**

MARS No.	Model	Size: W x L x H (in)	Color	Pallet Quantity
94765	POLAR3030-2	30 x 30 x 2	Gray	23
94762	POLAR3232-2	32 x 32 x 2	Gray /	23
94773	POLAR3636-2	36 x 36 x 2	Gray	23
94740	POLAR1838-3	18 x 38 x 3	Gray	32
94777	POLAR2424-3	24 x 24 x 3	Gray	64
94778*	POLAR2436-3	24 x 36 x 3	Gray	32
94729	POLAR2448-3	24 x 48 x 3	Gray	32
94784	POLAR3030-3	30 x 30 x 3	Gray Gray	16
94787	POLAR3232-3	32 x 32 x 3	Gray	16
94792	POLAR3636-3	36 x 36 x 3	Gray	16
94791	POLAR3842-3	38 x 42 x 3	Gray	16
94795	POLAR4040-3	40 x 40 x 3	Gray	16

<sup>\*</sup>Early 2024 Availability

