



1900 Wellworth Ave. • Jackson, MI 49203  
517-787-2100

# Submittal Data

MODEL  
**PTAC15F150A**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply 208/230V/60

#### Cooling

Capacity	Btu/h	14300/14500
Input	W	1430/1450
Rated current	A	6.4/7.0
EER	Btu/w	10.0/10.0

#### Heating

Capacity	Btu/h	NA
Rated Input (elect. Heater)	Kw	5
Rated current	A	NA
Max. Current	A	NA

#### Compressor Electrical

Model	44B342U
Type	ROTARY
Brand	RECHI
Capacitor	mF 30
Refrigerant type	oz R410A/34.2

#### Air flow & Noise level

Indoor air flow	CFM	700/800
Indoor noise level	dB(A)	49/52
Outdoor noise level	dB(A)	66

#### Indoor Fan Motor

Model	YDK-30-4P2-4
Input	W 64
Capacitor	uF 1.5
Speed(Hi/Lo)	rpm 1050/850

#### Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A
Wired Wall Thermostat	7602-536



**Outdoor Coil** Seacoast Coating

#### Outdoor Fan Motor

Model	YDK-55-4P2-4
Input	W 104
Speed	RPM 1600

#### Dimensional Data


Dimension(W*H*D)	inch	41.97x21.1x16.1
Packing (W*H*D)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	108/119

#### System Data

Design pressure	PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

#### Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-30P

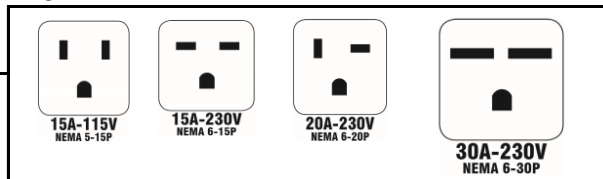

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535