



1900 Wellworth Ave. • Jackson, MI 49203  
517-787-2100

# Submittal Data

MODEL  
**PTHP12A150BSC**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply		208/230V/60
--------------	--	-------------

#### Cooling

Capacity	Btu/h	11800/12000
Input	W	1100/1140
Rated current	A	5.4/5.1
EER	Btu/w	10.7/10.5

#### Heating

Capacity	Btu/h	10800/11000
Rated Input (elect. Heater)	Kw	5
Rated current	A	4.5/4.2
Max. Current	A	7.3

#### Compressor Electrical

Model		44B282A
Type		ROTARY
Brand		RECHI
Capacitor	mF	25
Refrigerant type	oz	R410A/30.7

#### Air flow & Noise level

Indoor air flow	CFM	470/410
Indoor noise level	dB(A)	48/42
Outdoor noise level	dB(A)	66

#### Indoor Fan Motor

Model		YDK-30-4P2
Input	W	64
Capacitor	uF	1.5
Speed(Hi/Lo)	rpm	1050/850

#### Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536
Universal Remote	7602-512



Outdoor Coil	Seacoast Coating
--------------	------------------

#### Outdoor Fan Motor

Model		YDK-55-4P2
Input	W	95
Speed	RPM	1600

#### Dimensional Data


Dimension(W*D*H)	inch	41.97x21.1x16.1
Packing (W*D*H)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	110/123

#### System Data

Design pressure	PSIG
	Remote Controller
Thermostat type	On-Board
	Wired Thermostat

#### Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-20P

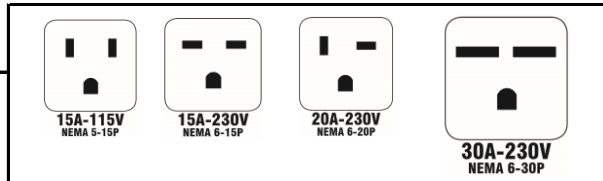

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Wired Thermostat	7800-201
Thermostat Locking Cover	7602-535