



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTTH12A-1

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

PERFORMANCE DATA

Power supply 208/230V/60

Cooling

Capacity Btu/h 11500/11700
 Input W 1200/1220
 Rated current A 6.1/5.6
 EER Btu/w 9.6/9.6

Heating

Capacity Btu/h 11200/11400
 Rated Input (elect. Ht) Kw 2900/3500
 Rated current A 5.9/5.4
 Max. Current A 8.00

Compressor Electrical


Model ASG112UN-A6DT
 Type ROTARY
 Brand Shanghai Hitaichi
 Refrigerant type oz R410A / 29.98

Air flow & Noise level

Indoor air flow CFM 271/247/224
 Indoor noise level dB(A) 59/57/55
 Outdoor noise level dB(A) 69/67/65

Indoor Fan Motor

Input W 30
 Capacitor uF 1.5
 Speed(Hi/Lo) rpm 1070/1000/920

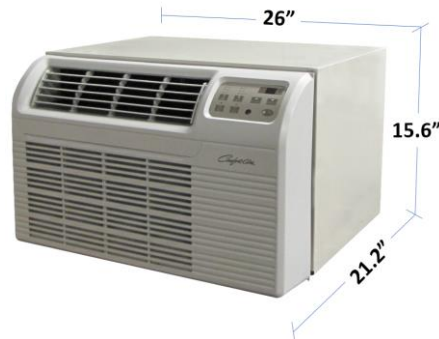

Outdoor Fan Motor

Input W 65
 Speed RPM 1600

Dimensional Data


Dimension(W*H*D) inch 26x15.6x21.2
 Packing (W*H*D) inch 29.6x17.8x24.4
 Net/Gross weight lbs. 86/99.2

System Data

Thermostat type Remote Controller
 On-Board
 Fresh Air CFM 23

Cord and Plug

Cord Length ft. 6
 Plug Face Nema LCDI 20

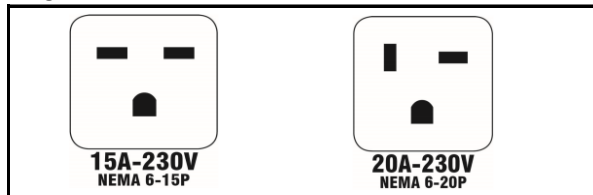

Accessories

Drain Kit	7602-506F	Stamped Grill	7602-801F
Wall Sleeve Breakdown	7602-800F	Architectural Grill	7602-805F